

SHOE BOX LIGHTING



Optional Mounting Mode

Slip flitter

U-Bracket

● Fixture

- High-pressure die cast aluminum housing with powder coated finish for corrosion resistance
- High reflection efficiency reflector imported from Germany Alanod aluminum company
- Separated lamp housing and ballast for longer lifespan
- Tempered glass lens for shock resistance and durable use
- Heat-resistance and gas tight rubber seal ensures high IP rating
- Different installation ways for chose
- IP Class: IP65



● Lamp and ballast

- 150-200W rectangle type induction lamp with high lumen efficiency, high lumen maintenance, long lifespan and excellent CRI
- 150-200W electronic ballast with profiled aluminum case features high power factor(>0.96), low energy loss and long lifespan


● Applications

- Parking lots, pedestrian walkways, roadway and other outdoor applications

● Distribution curve flux

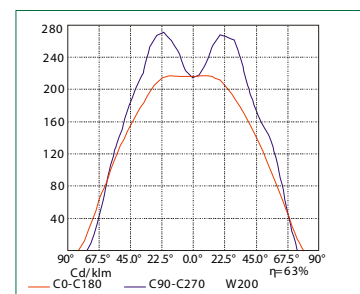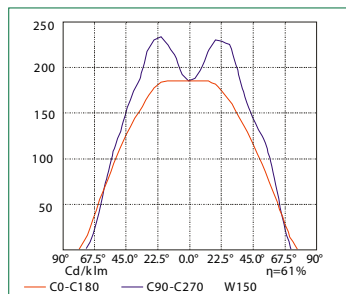

● Dimensions [Unit: inch(mm)]

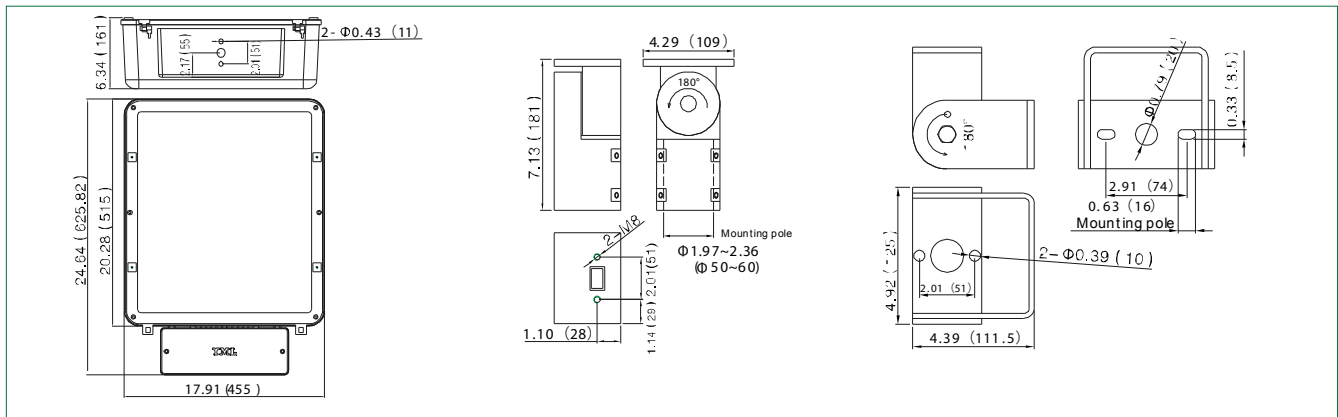

● Specifications

ERP NO.	MODEL	LAMP	WATTAGE (W)	BALLAST LOSS(W)	VOLTAGE (V)	CCT (K)	AMBIENT TEMPERATURE	INSTALLATION	REPLACE HPS LAMP(W)
	SBSF-W150	150W	150	<20	AC:120-277V AC:208-347V	5000	-20°C - 40°C -4°F - 104°F	Slip flitter	250
	SBSF-W200	200W	200	<24					400
	SBUB-W150	150W	150	<20	AC:120-277V AC:208-347V	5000	-20°C - 40°C -4°F - 104°F	U-Bracket	250
	SBUB-W200	200W	200	<24					400

Note: The products with CCT 2700-6500K are available upon request